


Technical bulletin / Bollettino tecnico

CF-065-4-1351

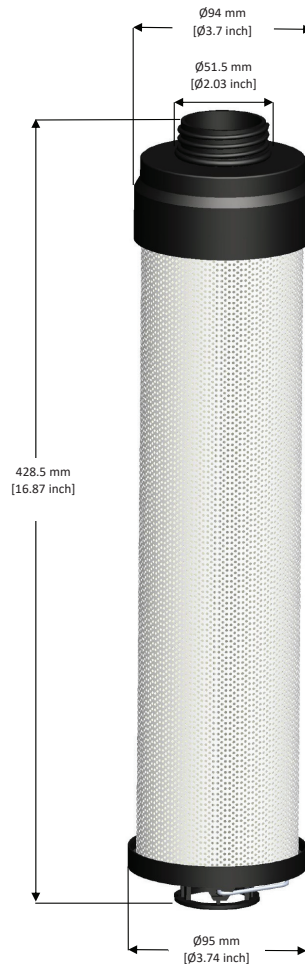

Technical data / Dati tecnici

Application / Applicazione	Hydraulic Filter / Filtro idraulico
Filter media / Media filtrante	Inorganic microfibers / Microfibra inorganica
Filtration rate / Grado filtrazione	12 $\mu\text{m(c)}$ $\beta > 1000$ ISO 16889
MAX differential pressure / MAX pressione differenziale	20 bar [290 psi]
By-pass valve / Valvola di by pass	3 bar [43 psi]
Gasket material / Materiale guarnizione	NBR

Cross Reference - main applications / applicazioni principali

Liebherr 11068050